




Master

*For a Continuous
Heated Air Flow!*

AIR HEATER BLOWER


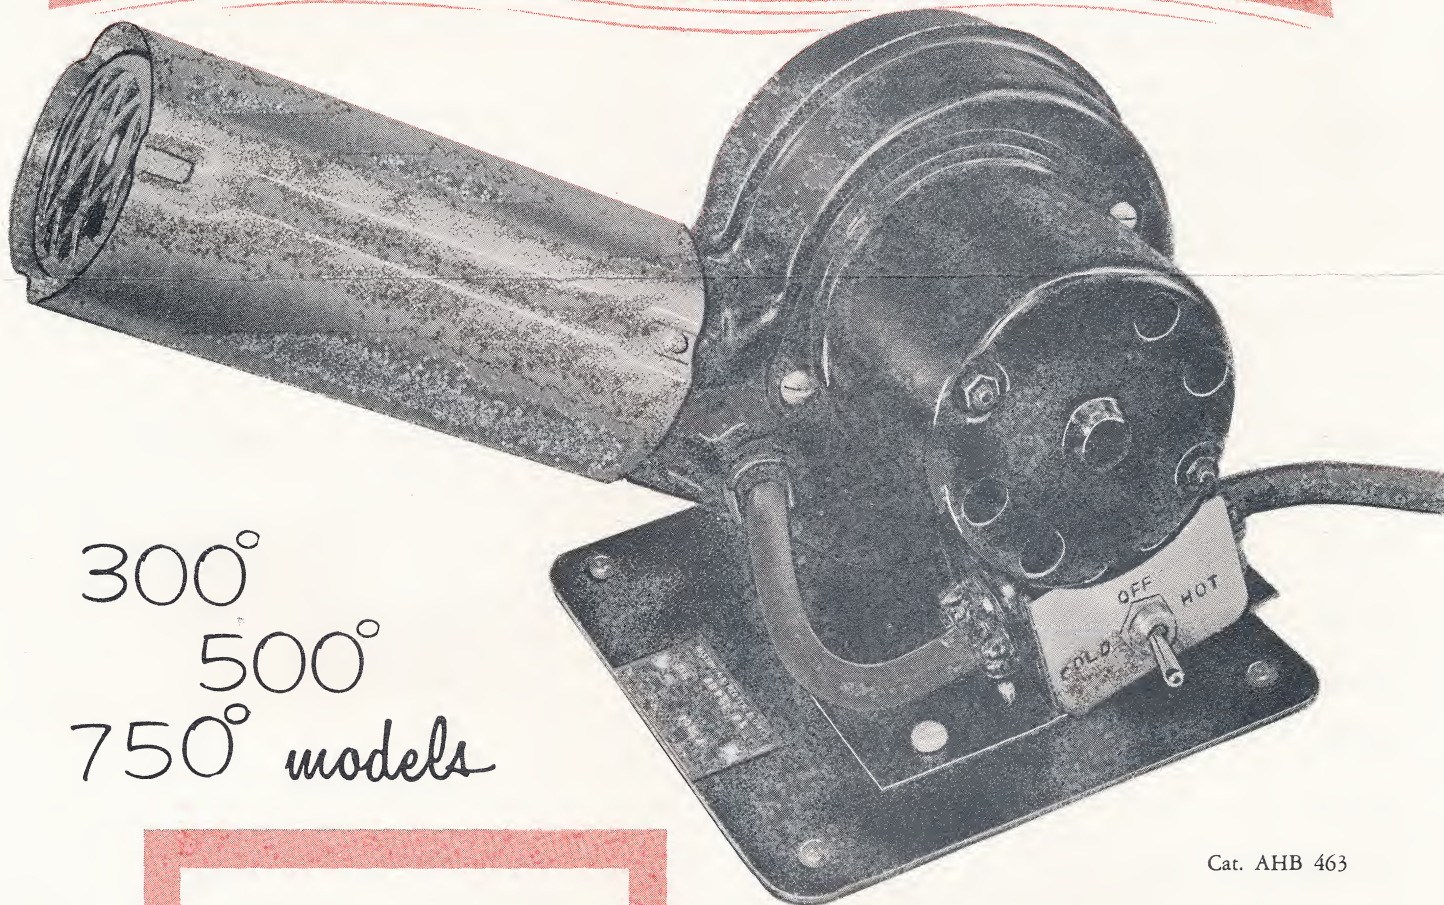


300°
500°
750° *models*

Cat. AHB 463

**Heated Air . . .
Where You
Need It!**

Ideal for mounting
on machines,
presses,
assembly
lines,
etc.

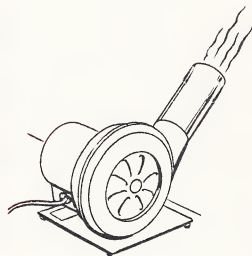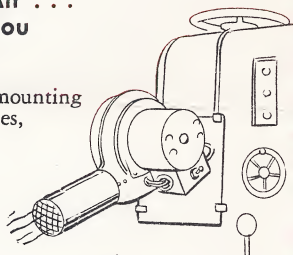

**Versatile,
portable**

— for localized
bench opera-
tions.

**For a continuous flow of electrically heated air to
localized situations. Reaches peak heat quickly—
maintains even temperature.**

Lightweight (7 to 8 lbs.) unit can be easily moved from
place to place as required, or it can be permanently
mounted for production line work. Two inch discharge
nozzle confines heat to desired area. Sturdy 6"x6" base,
6" high overall.

Ideal for accelerated drying material softening, film
shrinking, etc. Available in 300 F, 500 F, and 750 F
models to suit any heating requirement. Available in
115V and 230V. See specifications, reverse side.

All models equipped with 3-wire cord and plug. Adap-
tors for 2-prong receptacles furnished with 115V models.

**MASTER APPLIANCE CORP.
1745 FLETT AVE. • P.O. Box 545
RACINE, WISC.**

DISTRIBUTED BY

PRICE SCHEDULE - CH-E164 B

EFFECTIVE - May 1, 1964

AIR HEATER BLOWERS		PRICE
AH 301	115V with 3 wire cord & adaptor	\$ 56.65
AH 302	230V with 3 wire cord	68.35
AH 501	115V with 3 wire cord & adaptor	59.95
AH 502	230V with 3 wire cord	71.65
AH 751	115V with 3 wire cord & adaptor	78.35
AH 752	230V with 3 wire cord	90.25

NOTE: All prices subject to change without notice and to any governmental ruling beyond our control.
Orders will be invoiced at prices in effect at time of shipment.

TERMS: 2% 10, net 30 days to firms of approved credit.

F.O.B. Factory, Racine, Wisconsin.

HEATER BLOWER SPECIFICATIONS

MODEL	VOLTAGE A.C.	CYCLE	AMP.	TEMP. F°	AIR VOLUME C.F.M.	AIR VELOCITY F.P.M.
AH 301	115	60	10	300	50	2000
AH 302	230	60	5	300	50	2000
AH 501	115	60	14	500	50	2000
AH 502	230	60	6	500	50	2000
AH 751	115	60	18	750	50	2000
AH 752	230	60	8	750	50	2000

MODEL	NOZZLE DIAMETER	NOZZLE LENGTH	HEIGHT	OVERALL LENGTH	BASE DIMENSION	WEIGHT, SHIPPING
AH 301	2"	3"	6"	9"	6" x 6"	7 LBS.
AH 302	2"	3"	6"	9"	6" x 6"	7 LBS.
AH 501	2"	6"	8"	12"	6" x 6"	8 LBS.
AH 502	2"	6"	8"	12"	6" x 6"	8 LBS.
AH 751	2"	6"	8"	12"	6" x 6"	8 LBS.
AH 752	2"	6"	8"	12"	6" x 6"	8 LBS.

ALL MODELS EQUIPPED WITH 8 FT. LONG, NEOPRENE JACKETED, 3 WIRE GROUNDING TYPE CORD AND PLUG.

ALL 115V MODELS EQUIPPED WITH ADAPTOR FOR 2 PRONG RECEPTACLE.